


CT



Weights and dimensions

SWL	: 130 kg, 200 kg
Unit weight	: 4.5 kg
Carry bar weight (black)	: 2 kg
Carry bar weight (white)	: 1.2 kg
A	: 210 mm
B	: 180 mm
C	: 160 mm
D	: 515 mm
Lifting range	: 2,100 mm
Lift tape width	: 25 mm
Carry bar width (black)	: 615 mm
Carry bar width (white)	: 550 mm

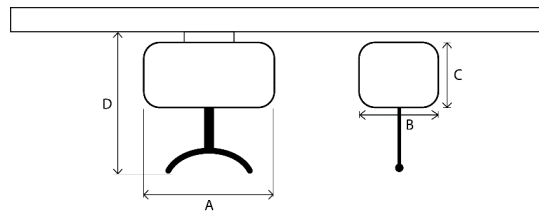

Features

Hand control	: Wired electric handset
Indicator	: LED battery level and fault information
Duty cycle	: 15% use, 85% rest
Battery	: 2x12 V NiMH, 3.3 Ah
Charging time	: 8.5 hours
Charging type	: In-track or handset charging
Lifts per charge	: 100 lifts at 130 kg : 60 lifts at 200 kg
Emergency stop	: Yes
Emergency lowering	: Electrical
IP rating (hoist)	: IP20
IP rating (handset)	: IP24
Carry bar type (black)	: QRS, 3 hook, looped
Carry bar type (white)	: QRS, 1 hook, looped
Cover material	: UL 94 V-0 flame retardant ABS

Standards

IEC 60601-1:2012	IEC 62366-1:2015
IEC 60601-2:2014	ISO 10535:2006
IEC 60601-1-11:2010	EN ISO 15223-1:2016



Step 1

Select Max User Weight (kg)

130 kg

200 kg



Step 2

Select Track Type

Prism Track

Track Type 2

Track Type 3

Track Type 4

Track Type 5

FSG/PFS



Step 3

Select Carry Bar

3 Point Carry Bar (Black)

Single Point Carry Bar (White)



Step 4

Select Charging Method

In-Track

Handset

